



Item no: 01.22.025

piINLINE® vacuum generator MINI Si, 6-6 mm

- Patented COAX® cartridge technology.
- High vacuum flow capacity in relation to energy consumption.
- Low weight inline design with push-in fittings for vacuum and compressed air.
- Quick and easy installation directly on the hose.
- Si cartridge for extra vacuum flow.
- Pi cartridge for high performance at low feed pressures.
- Xi cartridge when high flow and deep vacuum is needed.

General	
Item number, alternative	E12842166
Material	PA, SS, AL, CUZN, NBR
Weight	0.81 oz


Air consumption	25.7 l/m (.9 scfm) NI/s
Feed pressure, max.	101.5 psi

Diameter	0.75 in
Diameter	0.24 in
Length	3.78 in

Feed pressure	Air consumption	Vacuum flow (scfm) at different vacuum levels (-inHg)										Max vacuum
psi	scfm	0	2	5	8	11	14	17	20	23	26	-inHg
87	0.93	1.46	1.17	0.89	0.59	0.49	0.34	0.25	0.17	0	0	22.15

Feed pressure	Air consumption	Evacuation time (s/cf) to reach different vacuum levels (-inHg)									Max vacuum
psi	scfm	2	5	8	11	14	17	20	23	26	-inHg
87	12.46	4.53	10.48	18.69	31.15	39.64	59.47	87.78	0	0	22.15

Dimensional drawings

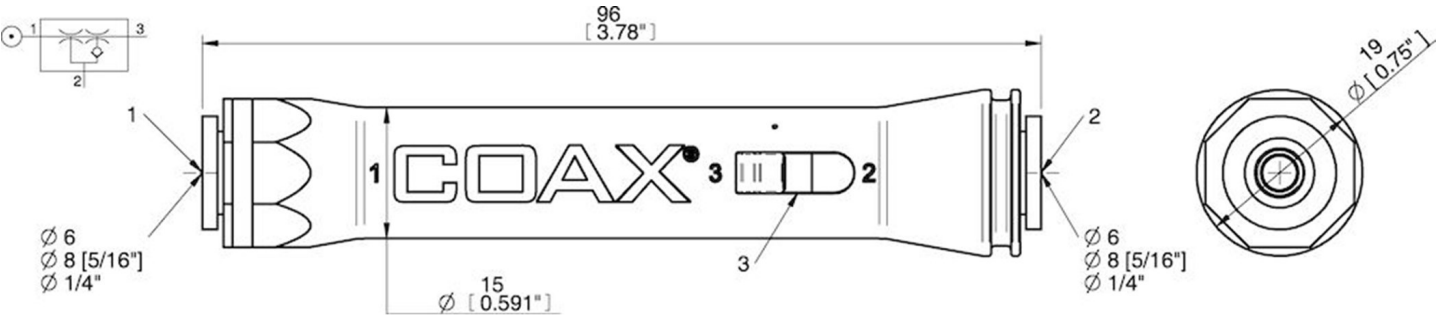

- Accessories
- 01.23.094 | Snap-in piINLINE® 4x MINI mounting bracket
 - 01.25.466 | Silencer piINLINE® MINI
 - 01.26.009 | Snap-in piINLINE® 1x MINI mounting bracket for silencer