

DDK END VIEW



1 = WHITE #1
2 = WHITE #2
3 = WHITE #3
4 = WHITE #4
5 = WHITE #5
6 = YELLOW #6
7 = YELLOW #7
8 = YELLOW #8
9 = YELLOW #9
10 = YELLOW #10
11 = PINK #11
12 = PINK #12
13 = PINK #13
14 = PINK #14
15 = PINK #15
16 = ORANGE #16
17 = ORANGE #17
18 = ORANGE #18
19 = ORANGE #19
20 = ORANGE #20
21 = LT. BLUE #21
22 = LT. BLUE #22
23 = LT. BLUE #23
24 = LT. BLUE #24

SPECIFICATIONS

OUTER JACKET MATERIAL/COLOR	TPE/BLACK
CONDUCTOR INSULATION MATERIAL	POLYESTER ELASTOMER
NUMBER OF CONDUCTORS	30x22 AWG
TEMPERATURE RATING	−40°C to +105°C (−40°F to +221°F)

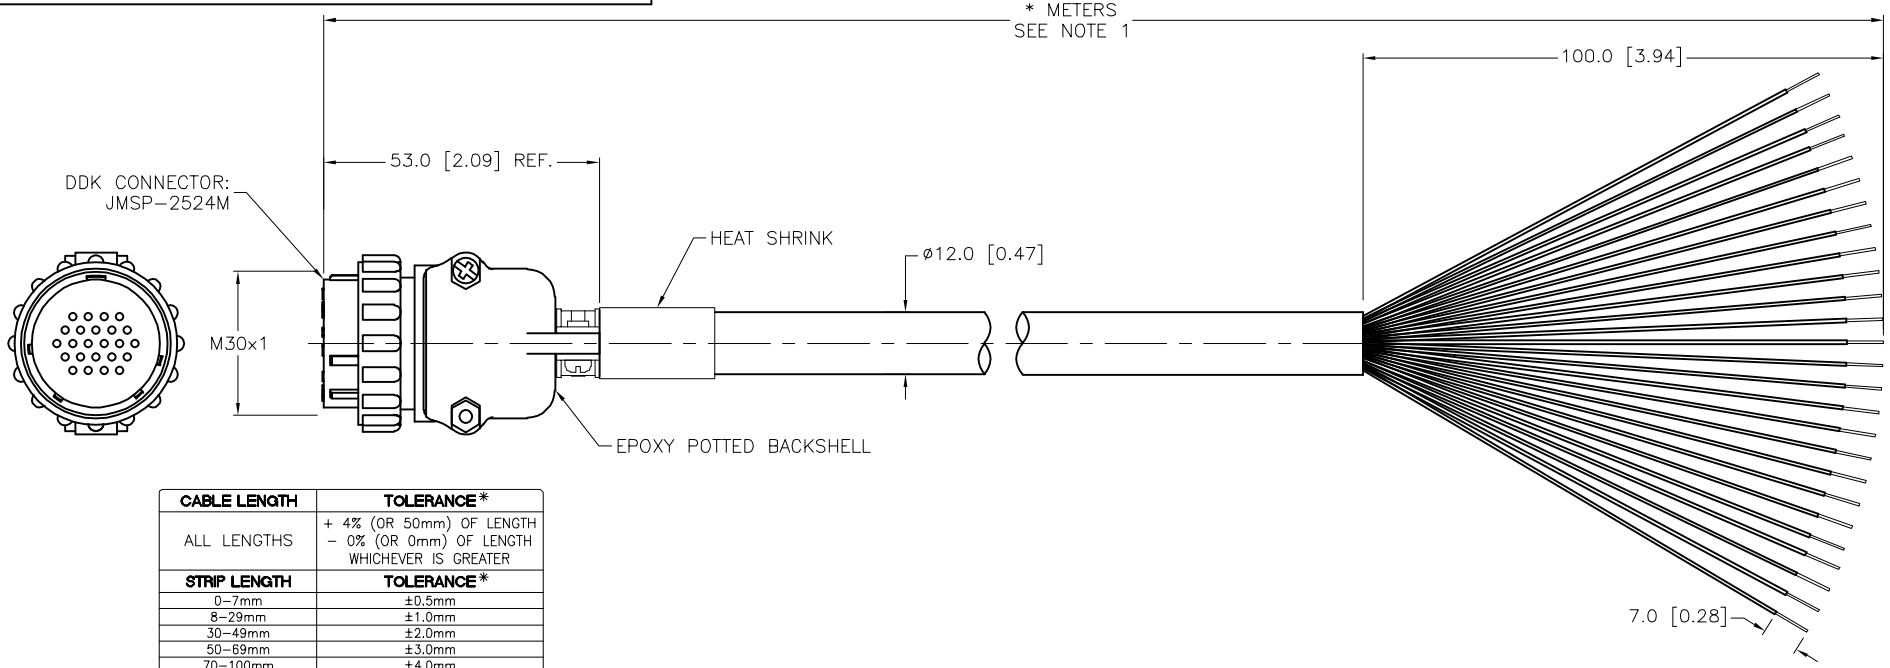

CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH − 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	**TOLERANCE ***
0−7mm	±0.5mm
8−29mm	±1.0mm
30−49mm	±2.0mm
50−69mm	±3.0mm
70−100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTH.

2. "/S101" DESIGNATES FLEXLIFE−20 AND C−TRACK RATED CABLE.

3. "/S1296" DESIGNATES CUSTOM WIRING AND EPOXY POTTED BACK SHELL. UNUSED CONDUCTORS ARE TRIMMED BACK TO CABLE JACKET ON BOTH ENDS.

REV	DESCRIPTION	BY	DATE	ECO NO.
C	UPDATE WIRING	NF	09/17/24	80664

RELATED DOCUMENTS
1.
2.
3.
4.

3RD ANGLE PROJECTION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

TURCK
3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1−800−544−7769
(763) 553−7300
(763) 553−0708 fax
www.turck.us

MATERIAL: SEE SPECIFICATIONS

FINISH: SEE SPECIFICATIONS

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

DRFT: KMY | DATE: 11/06/14
APVD: D.C. | SCALE: 1=1.5

UNIT OF MEASUREMENT
MILLIMETER [INCH]
DO NOT SCALE THIS DRAWING

DESCRIPTION: JMSP−2524M−2067−*/S101/S1296

IDENTIFICATION NO.:

REV: C

FILE: 777034391

SHEET 1 OF 1